



WPS R procedure user guide and reference

Contents


R Procedure.....	3
Introduction.....	4
Setup and configuration.....	4
Installing the R interpreter.....	5
Setting the <i>R_HOME</i> environment variable.....	6
Using R with WPS.....	6
Data type conversion.....	7
Using R graphics.....	8
Using additional R packages.....	9
SAS language macro processing.....	9
Example.....	10
R procedure reference.....	11
PROC R.....	12
ASSIGN.....	14
ENDSUBMIT.....	15
EXECUTE.....	16
EXPORT.....	17
IMPORT.....	18
LOAD.....	18
SAVE.....	20
SUBMIT.....	21
 Legal Notices.....	 23

R Procedure

The R procedure enables WPS programs written in the SAS language to include code written in the R language.

Combining the R language and the SAS language enables the bulk of a data processing and analytics solution to be written in the industrial strength and high-performing SAS language, while also exploiting features present in the R language.

The following image shows how a SAS language program using the R procedure is processed.

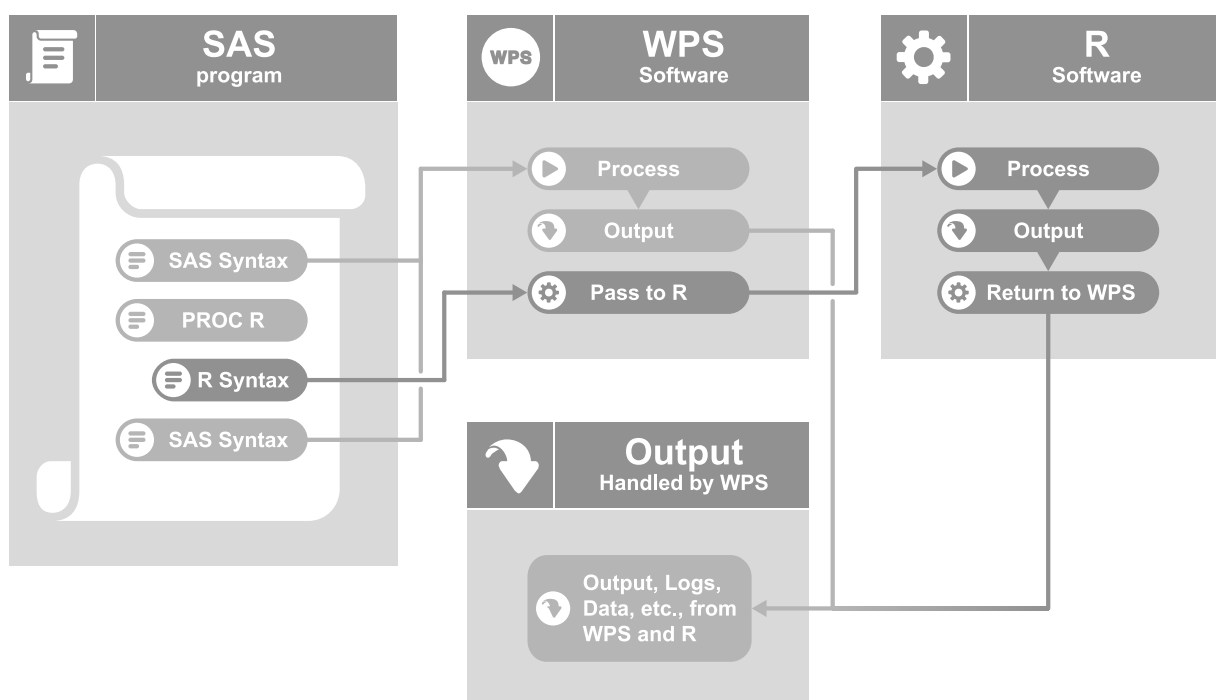

Introduction ↗	4
The R procedure enables SAS language programs to include code written in the R language.	
Setup and configuration ↗	4
Setting the R environment for WPS.	
Using R with WPS ↗	6
Using R in a SAS language program enables you to use features that might not be available in WPS.	
Example ↗	10
Demonstrates how to use a SAS language dataset in the R procedure to create a scatter plot diagram.	
R procedure reference ↗	11
Describes the syntax and options for PROC R and its contained statements.	

Introduction

The R procedure enables SAS language programs to include code written in the R language.

By combining R and the SAS language you can:

- Use the SAS language to bulk process and prepare data, and pass the processed data to R.
- Use R packages you have previously developed for data analysis.
- Use R data analysis packages or solutions that may not be available in the SAS language.

We recommend that programs are mainly coded in the language of SAS, using R where specialist statistics are required.

Data is passed between the SAS language and R language environments using the `EXPORT` statement. Once data has been transferred, that data is made available as a `data.frame` object to an R program. On completion of the R program data can, if required, be returned to the SAS language environment using the `IMPORT` statement.

Setup and configuration

Setting the R environment for WPS.

When using R with WPS:

- The 32-bit R interpreter is required for the 32-bit version of WPS, and the 64-bit R interpreter is required for the 64-bit version of WPS.
- You do not have to install extra modules, and there are no special licensing requirements to use the R procedure.

The R procedure can be used with R version 2.15.x and later, and is currently supported on Microsoft Windows, Linux-based systems, and macOS.

WPS software is not shipped with a copy of R. To use the R procedure, you need a separate installation of R.

Following R installation, set the `R_HOME` environment variable to point to the folder containing either `libr.dll` on Windows platforms or `libr.so` on UNIX or Linux platforms.

Installing the R interpreter

Windows platforms

The Windows installer package can be downloaded from <http://www.r-project.org/> and includes both 32-bit and 64-bit versions of R. The same installer can be used for both 32-bit and 64-bit versions of the WPS software.

By default, the R installation saves the installation location in the Windows registry which is where WPS looks to identify the currently installed version. This is the version of R most recently installed, and no special configuration of WPS is required for WPS to locate it.

UNIX or Linux platforms

WPS requires the shared R library `libr.so` to interact with the R interpreter. This library is not included with the R binary distribution for UNIX platforms by default. On UNIX or Linux platforms, you need to either build R from source to include the required shared library, or install R using your systems package management system.

To build from source code:

1. You require a minimal set of pre-installed libraries before you can build R from source code. These are equivalent to the *build-essentials* package plus a JDK on Ubuntu.
2. Download the R source code from <http://www.r-project.org/> and follow the instructions included with the download. Ensure you use the `-re-establishment` option when running `configure` to build the `libr.so` shared library, for example:

```
./configure --enable-R-shlib --prefix=$HOME/R
```

For more information, see the R documentation at <http://www.r-project.org/>.

macOS platforms

The binary distribution of R can be installed directly from the R project website.

To use R with WPS, the `R_HOME` variable must be set to point to the installation directory containing the `libr.so` shared library. The default setting is: `/Library/Frameworks/Framework/Resources`. Because of the way applications are launched on macOS, it is not possible to set `R_HOME` in a shell profile script.

To use a specific version of R, you can modify the setting appropriately, for example: `/Library/Frameworks/Framework/Versions/3.0/Resources`

Setting the *R_HOME* environment variable

To locate the installed version of R, the *R_HOME* environment variable must be set.

On Windows platforms, the *R_HOME* environment variable must point to the folder containing the `libr.dll` file. On UNIX or Linux platforms, the *R_HOME* environment variable must point to the folder containing the `libr.so` file.

If you are running WPS with R on a Unix or Linux platform, set the *R_HOME* variable to point to the folder containing `libr.so`.

If you have multiple installations of R, set *R_HOME* variable as part of the SAS language program you run in WPS.

Set *R_HOME* before running WPS

The *R_HOME* variable can be defined as a system variable, and used by all applications on your device that run R. It is not necessary to set the variable on the Windows platform if the default R installation location is used.

Set *R_HOME* in a SAS language program

The *R_HOME* variable can be set in a SAS language program using the `SET` system option, for example:

```
OPTIONS SET = R_HOME 'C:\Program Files\R\R-3.5.0';
```

This will set the *R_HOME* environment variable for duration of the execution of the SAS language program.

Using R with WPS

Using R in a SAS language program enables you to use features that might not be available in WPS.

Installed R packages can be imported and used within the in-line R code using the library statement, for example:

```
PROC R;  
  SUBMIT;  
    library(datasets)  
    data(iris)  
    summary(iris)  
    plot(iris)  
  ENDSUBMIT;  
RUN;
```

Each subsequent use of the R procedure in a SAS language program can use the same R environment. This means any global variables or imported packages used in an R procedure invocation are available to all subsequent R procedure invocations.

Each R procedure invocation can include multiple blocks of in-line R language code, and use a combination of in-line R language code, and R programs run using the `EXECUTE` statement.

Data type conversion

Describes the correspondence between SAS language formats and R data types.

When you write data to a `data.frame` using the R procedure `EXPORT` statement, formatted data is converted to an equivalent R data type. WPS has many formats that affect the output and display of data. Formats that only affect the layout of data output, such as adding currency symbols or comma separators, have no effect when writing data.

A `data.frame` is imported using the R procedure `IMPORT` statement. Any object that can be coerced into a `data.frame` using the `as.data.frame` R function is imported into the WPS dataset.

Logical values

Logical values are converted into numeric values in the WPS dataset. The values of vectors of type logical are converted as follows:

R Value	WPS Value
TRUE	1
FALSE	0

Integer values

The R language value `NA`, which is represented as the minimum integer value (-2147483648) is converted to a SAS language missing value.

Real values

There are three special real numeric values in the R language:

- `NA` (Not Available). Represents an absent value.
- `NaN` (Not a Number). Represents an undefined value, or a value that cannot be displayed, for example the result of zero divided by zero.
- `Inf` (Infinity). Represent positive and negative infinite values. For example the result of trying to divide any value by zero.

These values are converted from the R language representation to the SAS language representation as follows:

R Value	WPS Value
<code>NA</code>	<code>.</code> (missing value)
<code>NaN</code>	<code>.</code> (missing value)
<code>+Inf</code>	<code>.I</code>
<code>-Inf</code>	<code>.M</code>

Date values

Integer or real variables in the R language that have a `Date` class are formatted as `DATE9.` when imported into WPS.

R language `Date` values represent a count of days from the Unix epoch of 1 January 1970 UTC. Imported variables are adjusted to take account of the SAS language epoch of 1 January 1960.

Datetime values

Real variables in the R language that have a `POSIXct` class are formatted as `DATETIME19.` when imported into WPS.

R language `POSIXct` values represent a count of seconds from the Unix epoch of 1 January 1970 UTC. Imported variables are adjusted to take account of the SAS language epoch of 1 January 1960 and also use the value specified in the `GMTOFFSET` option of the `PROC R` statement.

Real variables in the R language that have a `times` class are formatted as `TIME8.` when imported into WPS.

Character values

On import, WPS scans a character variable and assigns a format that is the length of the longest string. Individual values in a character variable that are `NA` (Not Available) are converted to the SAS language missing character value (`' '`).

Factor values

An R language *factor* is a form of integer variable, where the values index a list of categorical variables (the list is known as a level in the R language). When imported into WPS these are converted into character variables in the dataset. The variable is given a length equal to the longest string in the levels list.

Using R graphics

When launching an R session, WPS configures R so that any graphics generated with the default graphics device are captured and included in the WPS session's standard ODS HTML output.

The following program extends the previous example to include simple linear regression analysis and graphics.

1. Create a new program file, paste the following code, and save the file:

```
data source;
  do x=1 to 10;
    y=ranuni(-1);
    output;
  end;

PROC R;
  export data=source;
  submit;
  model <- lm(source$y ~ source$x)
  print(model)
  par(mfrow=c(2, 2))
  plot(model)
endsubmit;
run;
```

2. Run the program by clicking on the toolbar **Run** icon, and examine the HTML output.

The output includes the printed R results together with a single graphic generated within the R session and routed into the WPS output.

```
Call:
lm(formula = source$y ~ source$x)
Coefficients:
(Intercept)      source$x
    0.5344         0.0241
```

Using additional R packages

To use additional packages that are not included in your R installation, we recommend you install and check the basic operation of these packages in the interactive R environment. Installed packages can be used in an R program using the `library()` function.

An R environment launched by WPS inherits the environment variables from the WPS process. If third-party software is installed for use in R that requires, for example, additional entries in the `PATH` environment variable, Workbench must be restarted to register the changes.

SAS language macro processing

Using SAS language macros with in-line R programs.

When an in-line R program is run, the code between the `SUBMIT` and `ENDSUBMIT` statements is passed verbatim to the R interpreter. Macro processing is, therefore, suspended between the `SUBMIT` and `ENDSUBMIT` statements because:

- The R language uses the `&` and `%` characters as part of its syntax. Attempting to macro process the R source code might result in valid R syntax being misinterpreted as SAS language macro statements.
- The R language allows line-end style comments. The contents might contain, for example, unmatched apostrophes; tokenising of the R syntax using the regular SAS language parsing rules could not then occur.

Example

Demonstrates how to use a SAS language dataset in the R procedure to create a scatter plot diagram.


The following example creates a dataset in a SAS language `DATA` step, and then uses the `EXPORT` statement to pass that dataset to the R environment. The dataset is converted to a `data.frame` as part of the export, and the `data.frame` is used to create plots in a grid two plots wide and two plots deep.

An output PDF file destination is created using the SAS language Output Delivery System (ODS). Adding PDF to the output destinations includes the printed `data.frame` content and returned plot image file in the PDF output. The PDF is saved and the output can be viewed in a PDF viewer.

```
ODS PDF FILE='scatter_plot.pdf';
DATA SOURCE;
  DO X=1 TO 10;
    Y=RANUNI(-1);
    OUTPUT;
  END;
RUN;

PROC R;
  EXPORT DATA=source;
  SUBMIT;
    str(source)
    print(source)
    model <- lm(source$Y ~ source$X)
    print(model)
    par(mfrow=c(2, 2))
    plot(model)
    x <- (1:10)
  ENDSUBMIT;
  IMPORT R=x;
RUN;
ODS PDF CLOSE;
```

This creates the following plot in the ODS PDF output:

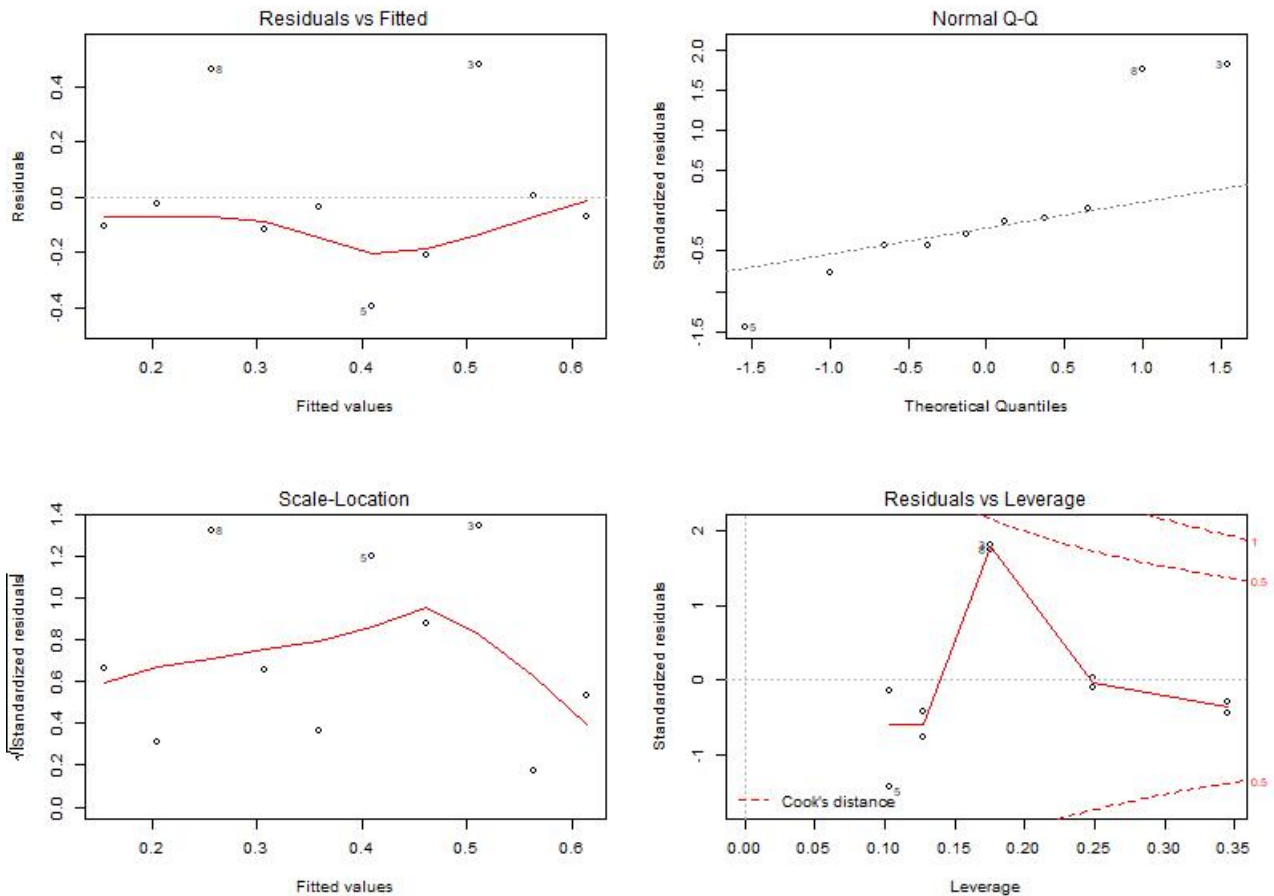

R procedure reference

Describes the syntax and options for PROC R and its contained statements.

PROC R ↗	12
Invokes the R environment that enables the execution of in-line or external R language programs.	
ASSIGN ↗	14
The ASSIGN statement can be used to assign SAS language variable values to an R vector.	
ENDSUBMIT ↗	15
Specifies the end of an in-line R language program.	
EXECUTE ↗	16
Runs an R program stored in a separate file.	
EXPORT ↗	17
Enables a SAS language dataset to be converted to an R <code>data.frame</code> and referenced in an R program.	

IMPORT ↗	18
Enables an R language <code>data.frame</code> to be converted to a SAS language dataset and referenced in a SAS language program.	
LOAD ↗	18
The <code>LOAD</code> statement deserialises an <i>R object</i> stored in a SAS language catalog.	
SAVE ↗	20
Enables R objects to be serialised and stored in a SAS language catalog.	
SUBMIT ↗	21
Specifies the start of an in-line R language program.	

PROC R

Invokes the R environment that enables the execution of in-line or external R language programs.

```
PROC R [ { R_options ... } ] ;
```

Datasets created in WPS can be made available to the R program using the `EXPORT` statement, and a dataset imported from the R program into WPS using the `IMPORT` statement.

An R program can be either written in-line in the R procedure, or run from a separate file:

- To run an in-line R program, use the `SUBMIT` and `ENDSUBMIT` statements.
- To run an R program stored in an external file use the `EXECUTE` statement.

The R environment is exited using a `RUN` statement.

Options

The following options are available.

GMTOFFSET

Specifies the offset to UTC applied when moving datasets between the SAS language and R language environments to take account the current time zone.

```
GMTOFFSET = "+/-HH:MM"
```

Date and time values in the R language are represented in UTC (Coordinated Universal Time) with an associated time zone. In the SAS language date and time values have no implied time zone. The specified `GMTOFFSET` is applied when using the `ASSIGN`, `EXPORT`, or `IMPORT` statements.

KEEP

Specifies that the current R environment is not terminated when the procedure exits.

```
KEEP
```

When specified, the current R environment is kept active when the current procedure exits, and the environment is used in the next invocation of the R procedure in the same program. If that invocation does not specify `KEEP`, the environment is terminated when the procedure exits.

The default behaviour is to terminate the R environment at the end of the procedure. Specifying `KEEP` keeps the current R environment, including any modules loaded during the execution of a R program, to be used in the next invocation of `PROC R`.

You can specify the `RKEEP` system option to use the same R environment for the duration of the execution of the SAS language program.

LIB

Specifies the default library location for the procedure step. The default location is the `WORK` library.

```
LIB = default-library
```

The `LIB` location is used:

- When exporting a dataset, and `libname` is not specified as part of the path for the `DATA` option of the `EXPORT` statement.
- When importing a dataset, and `libname` is not specified as part of the path for the `DATA` option of the `IMPORT` statement.
- When saving an R object to a SAS language catalog, and `libname` is not specified as part of the path for the `CATALOG` option of the `SAVE` statement.
- When loading an R object to a SAS language catalog, and `libname` is not specified as part of the path for the `CATALOG` option of the `LOAD` statement.

TERMINATE

Specifies that the R environment is terminated when the procedure exits.

```
[ TERMINATE | TERM ]
```

Specifying `TERMINATE` stops the current R environment even if the `RKEEP` system option has been specified.

TIMESASCHRON

Specifies whether time values are represented in R using the `chron` class.

```
TIMESASCHRON
```

By default, time values are stored in the R `POSIXct` type, representing a count of seconds from midnight. When `TIMESASCHRON` is specified, time values are stored in R as `chron.times` types.

To use the `TIMESASCHRON` option, you must include the `chron` package in your R environment using the R `library()` statement.

Example

The following example shows how to use PROC R to find the version of the R interpreter used with WPS. Version information is written to ODS output.

```
PROC R;  
  SUBMIT;  
    print(R.version)  
  ENDSUBMIT;  
RUN;
```

ASSIGN

The ASSIGN statement can be used to assign SAS language variable values to an R vector.

```
ASSIGN object-name =  
  [ variable-value |  
    ( { variable-value, ... } )  
  ] ;
```

The ASSIGN statement is used to pass parameters to an R program, and the specified *object-name* can be used in an in-line program or a program run using the EXECUTE command. *object-name* is case sensitive and, unlike SAS language variables, must be referred to in the R program using the same case as in the ASSIGN definition.

Variables can be generated using SAS language macro variable expansion or execution. This enables you to preprocess variables using the SAS language and pass the result to an R program.

object-name

Specifies one or more variable values to pass to an R program. The *object-name* specifies the variable name by which the *variable-value* is referenced in the R program.

The *object-name* can be defined using a SAS language name literal ('*object.name*'N) to create an R object that would not be valid in the SAS language. For example, to assign a value Peter to an R object `employee.firstname`, the ASSIGN statement would be:

```
ASSIGN 'employee.firstname'N = 'Peter';
```

Multiple *variable-values* can be assigned to a single R language object. In this case, all values must be of the same type and in a comma-separated list in parenthesis.

Passing multiple variables to R

In this example, multiple vector variables are passed from a SAS language program to an R program that converts the vectors into a data frame.

```
PROC R;  
  ASSIGN Nu = (1, 2, 3, 4, 5);  
  ASSIGN Ch = ('Cyan', 'Magenta', 'Yellow', 'Black', 'Green');  
  SUBMIT;  
    DFrame <- data.frame(Nu, Ch)  
    print (DFrame)  
  ENDSUBMIT;  
RUN;
```

This produces the following output:

```
Nu      Ch  
  1     Cyan  
  2  Magenta  
  3   Yellow  
  4    Black  
  5     Green
```

Assigning a SAS language macro variable to an R object

In this example, the SAS language macro variable *PARM* is passed to an R program to determine the sample size in a randomly-generated sample.

```
%LET PARM=15;  
PROC R;  
  ASSIGN parm=&PARM;  
  SUBMIT;  
    x<-sample(1:3, parm, replace=TRUE)  
    print(x);  
  ENDSUBMIT;  
RUN;
```

This produces the following output:

```
[1] 1 1 3 3 3 2 1 1 3 1 1 3 3 1 1
```

ENDSUBMIT

Specifies the end of an in-line R language program.

```
ENDSUBMIT ;
```

The `ENDSUBMIT` statement must be entered at the start of a new line after the R language program.

EXECUTE

Runs an R program stored in a separate file.

```
EXECUTE " filename " [ { cmd-argument ... } ] ;
```

The `EXECUTE` statement is an alternative to using the `SUBMIT` statement. It allows the R code to be placed in a separate file and enables you to run the same program in both WPS and an interactive R environment.

filename

A quoted string containing the path of the R program file. *filename* can be either an absolute path or a relative path.

When using Workbench to run an R language program, if a relative path is specified the root of the path is the Workspace. For example, to run a file named `math.r` from a project named `calculate`, the relative path is `calculate/math.r`.

cmd-argument

Specifies a command line argument passed to the R program.

An example of executing an R program stored in a file

In this example, an R program stored in an external file `model.r` is executed in the R procedure. The contents of `model.r` source file:

```
model <- lm(source$Y ~ source$X)
print(model)
par(mfrow=c(2, 2))
plot(model)
```

The following program creates a dataset. The dataset is passed to the R program using the `EXPORT` statement before the program is run using the `model.r` file:

```
DATA SOURCE;
DO X=1 TO 10;
  Y=RANUNI(-1);
  OUTPUT;
END;

PROC R;
  EXPORT DATA=source;
  EXECUTE "model.r";
RUN;
```


EXPORT

Enables a SAS language dataset to be converted to an R `data.frame` and referenced in an R program.

```
EXPORT { EXPORT_option ... } ;
```

Export options

The following options are available with the `EXPORT` statement.

DATA

Specifies the name of the WPS dataset.

```
DATA = [ libname ] . [ dataset ]
```

The library location can be specified using either `libname` in the `DATA` option, or the `LIB` option of the `PROC R` statement:

- If `libname` is specified, that location is always used.
- If the `LIB` option of the `PROC R` statement is specified and `libname` is not specified, the location in the `LIB` option is used.
- If neither `libname` or the `LIB` option on the `PROC R` statement are specified, the `WORK` location is used.

R

Specifies the name of the `data.frame` as used in the R environment.

```
R = r-dataframe
```

If this option is not specified, the `r-dataframe` default is the `dataset` name specified in the `DATA` option. If you use the default `dataset` name in an in-line R language program, the variable name must match the case used in the `DATA` option.

An example of exporting data from WPS to R

The following example creates a dataset containing two numeric columns. The dataset is exported to the R environment and the content of the `data.frame` printed to ODS output.

```
DATA SOURCE;  
  DO X=1 TO 10;  
    Y=RANUNI(-1);  
  OUTPUT;  
END;  
  
PROC R;  
  EXPORT DATA=SOURCE;  
  SUBMIT;  
    str(source)  
  ENDSUBMIT;  
RUN;
```

This produces the following output:

```
'data.frame': 10 obs. of 2 variables:  
 $ x: num 1 2 3 4 5 6 7 8 9 10  
 $ y: num 0.371 0.924 0.59 0.434 0.962 ...
```

IMPORT

Enables an R language `data.frame` to be converted to a SAS language dataset and referenced in a SAS language program.

```
IMPORT { IMPORT_option ... } ;
```

Import options

The following options are available with the `IMPORT` statement.

DATA

Specifies the dataset location and name as used in the WPS Analytics SAS language environment.

```
DATA = [ libname . ] dataset
```

The library location can be specified using either `libname` in the `DATA` option, or the `LIB` option of the `PROC R` statement:

- If `libname` is specified, that location is always used.
- If the `LIB` option of the `PROC R` statement is specified and `libname` is not specified, the location in the `LIB` option is used.
- If neither `libname` nor the `LIB` option on the `PROC R` statement are specified, the `WORK` location is used.

If this option is not specified, the `dataset` default is the `r-dataframe` name specified in the `R` option.

R

Specifies the name of the `data.frame` as used in the R environment. Must be specified

```
R = r-dataframe
```

`r-dataframe` is case sensitive and must match the case used for the imported `data.frame` in the R program.

LOAD

The `LOAD` statement deserialises an *R object* stored in a SAS language catalog.

```
LOAD { LOAD_option ... } ;
```

The `SAVE` and `LOAD` statements enable an R object to be serialised and stored in a SAS language catalog and later deserialised in a WPS session. The `SAVE` statement serialises an R object and stores it in an entry in a catalog. The `LOAD` statement deserialises an R object from a catalog.

Load options

The following options are available with the `LOAD` statement.

CATALOG

Specifies the catalog from which the stored R object is loaded.

```
[ CATALOG | CAT | C ] = [ libname . ] catalog . entry
```

A SAS language catalog is defined using:

libname

Specifies the name of the library in which the catalog is stored. The library location can be specified using either *libname* or the `LIB` option of the `PROC R` statement.

- If *libname* is specified, that location is always used.
- If the `LIB` option of the `PROC R` statement is specified and *libname* is not specified, the location in the `LIB` option is used.
- If neither *libname* nor the `LIB` option on the `PROC R` statement are specified, the `WORK` location is used.

catalog

Specifies the name of the catalog.

entry

Specifies the name of the R object in the catalog.

R

Specifies the variable name for the loaded R object as used in the R language program.

```
R = object-name
```

Because R is case-sensitive, *object-name* must match the case used of the R variable name.

The name can be specified using name literal syntax (for example `"r.object.name"`) if the name of the R object does not follow the normal rules for identifiers in the SAS language.

An example of using the `LOAD` statement

```
proc r;  
  load cat=catalog.entry r='target.object'n;  
run;
```

SAVE

Enables R objects to be serialised and stored in a SAS language catalog.

```
SAVE { SAVE_option ... } ;
```

The `SAVE` and `LOAD` statements enable an R object to be serialised and stored in a SAS language catalog and later deserialised in a WPS session. The `SAVE` statement serialises an R object and stores it in an entry in a catalog. The `LOAD` statement deserialises an R object from a catalog.

Save options

The following options are available with the `SAVE` statement.

CATALOG

Specifies the location in which the R object will be saved.

```
[ CATALOG | CAT | C ] = [ libname . ] catalog . entry
```

The library location can be specified using either `libname` or the `LIB` option of the `PROC R` statement:

libname

Specifies the name of the library in which the catalog is stored. The library location can be specified using either `libname` or the `LIB` option of the `PROC R` statement.

- If `libname` is specified, that location is always used.
- If the `LIB` option of the `PROC R` statement is specified and `libname` is not specified, the location in the `LIB` option is used.
- If neither `libname` nor the `LIB` option on the `PROC R` statement are specified, the `WORK` location is used.

catalog

Specifies the name of the catalog.

entry

Specifies the name of the R object in the catalog.

R

Specifies the name of the R object to save to the catalog. Must be specified.

```
R = object-name
```

Because R is case-sensitive, the case of `object-name` must match the object name in the R program. The name can be specified using name literal syntax (for example `"r.object.name"`) if the name of the R object does not follow the normal rules for identifiers in the SAS language.

DESCRIPTION

Specifies a description string saved with the catalog entry.

```
DESCRIPTION = "Catalog entry description"
```

The description is displayed in the output from the PROC CATALOG statement.

The catalog entry will have a type of ROBJECT.

An example of saving an R object to a WPS catalog

```
proc r;  
  save cat=catalog.entry r='source.object' n;  
run;
```

SUBMIT

Specifies the start of an in-line R language program.

```
SUBMIT [ { SUBMIT_option ... } ] ;
```

An in-line R language program is defined as part of the R procedure in a SAS language program. The SUBMIT statement marks the start of the program, and the ENDSUBMIT statement marks the end.

An R language program must start on a new line after the SUBMIT statement, and the ENDSUBMIT statement must appear at the beginning of a line on its own.

Multiple in-line R language programs can exist in a single R procedure environment. Each R language program is executed as it is encountered. Variables defined in one R language program can be used in subsequent in-line programs in the same R procedure environment.

SUBMIT options

The following option can be used with the SUBMIT statement.

r-symbol

Enables the replacement of a symbol in the R program with a string.

```
r-symbol = 'substitution-value'
```

Before being passed to the R environment, an in-line R program is pre-processed to replace any *r-symbol* defined in the program with the content of the *substitution-value*. If the *substitution-value* is a string, it must be surrounded by quotation marks. If *substitution-value* is a SAS language macro variable, it must be prepended by an ampersand (&), but quotation marks are not required.

The *r-symbol* name is case sensitive and must be referred to in the R program using the same case as in the `SUBMIT` statement definition.

```
PROC R;  
SUBMIT greeting = 'Hello World';  
r.welcome <- "&greeting."  
print (r.welcome)  
ENDSUBMIT;  
RUN;
```

The syntax for replacing a defined *r-symbol* is the same as that used for SAS language macro variable substitution, the name of the defined *r-symbol* is prepended by an ampersand (&) in the inline code.

SUBMIT statement – basic example

The following example shows how to incorporate an R-language program into a SAS language program:

```
PROC R;  
SUBMIT;  
x <- (1:10)  
print(x)  
ENDSUBMIT;  
RUN;
```

Which outputs the following:

```
[1] 1 2 3 4 5 6 7 8 9 10
```

SUBMIT statement – using a macro variable in an R program

The following example shows how to pass a variable from a SAS language program to an R language program. The variable *welcome* is defined using the SAS language `%LET` macro. The specified macro variable is assigned to the *r-symbol* of the `SUBMIT` statement. The *r-symbol* is then referenced in the inline R language program:

```
%LET welcome = 'Hello World';  
PROC R;  
SUBMIT greeting = &welcome;  
r.welcome <- "&greeting"  
print (toupper(r.welcome))  
ENDSUBMIT;  
RUN;
```

Which outputs the following:

```
[1] "HELLO WORLD"
```

Legal Notices

Copyright © 2002–2019 World Programming Limited.

All rights reserved. This information is confidential and subject to copyright. No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying, recording, or by any information storage and retrieval system.

Trademarks

WPS and World Programming are registered trademarks or trademarks of World Programming Limited in the European Union and other countries. (r) or ® indicates a Community trademark.

SAS and all other SAS Institute Inc. product or service names are registered trademarks or trademarks of SAS Institute Inc. in the USA and other countries. ® indicates USA registration.

All other trademarks are the property of their respective owner.

General Notices

World Programming Limited is not associated in any way with the SAS Institute.

WPS is not the SAS System.

The phrases "SAS", "SAS language", and "language of SAS" used in this document are used to refer to the computer programming language often referred to in any of these ways.

The phrases "program", "SAS program", and "SAS language program" used in this document are used to refer to programs written in the SAS language. These may also be referred to as "scripts", "SAS scripts", or "SAS language scripts".

The phrases "IML", "IML language", "IML syntax", "Interactive Matrix Language", and "language of IML" used in this document are used to refer to the computer programming language often referred to in any of these ways.

WPS includes software developed by third parties. More information can be found in the THANKS or acknowledgments.txt file included in the WPS installation.